

HITACHI
Inspire the Next

65 inch FHD Interactive Flat Panel Display



*All images are simulated.

- **65 inch Full HD Resolution Panel**

All-in-one solution with 65 inch Full HD panel.

- **Up to 10 point of touch (simultaneous)**

Ideal function for class rooms.

You can write from both right and left sides.

- **Stereo speakers (20W total)**

20W stereo speakers facilitate to deliver the sound to your audience directly.

- **Front HDMI and USB inputs**


Simply plug in your computer with HDMI and USB for touch control and you are ready to go.

- **Both Windows® and Mac OS® compatible**

- **More convenient features are available, including**

LAN port for control, OPS slot, magnetic stylus pens.

Technical Specifications

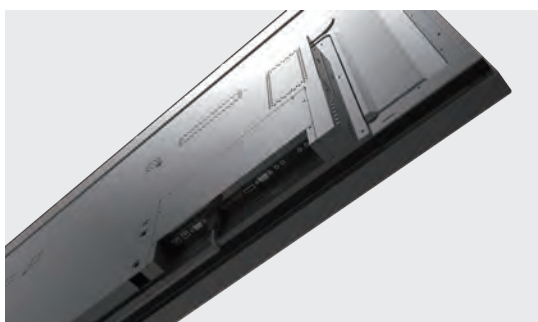

| LED PANEL | |
|---------------------------|-----------------------|
| Diagonal size | 64.56" / 163.9(cm) |
| Display Resolution (Max.) | 1,920 x 1,080 (FHD) |
| Brightness (average) | 350 cd/m² |
| Viewing Angle | H: 176° / V: 176° |
| Contrast ratio | 5000:1 (Typ.) |
| Supported Colors | 16.7M colors (8bit) |
| Response Time | 6.5ms (Gray to Gray) |
| Display Frame Rate | 60Hz (Actual) |
| Installation | Landscape Orientation |

| TOUCH | |
|-----------------------|---|
| Detect area | 1428.5(H) x 803.5(V) mm / 56.24"(H) x 31.63"(V) |
| Detection method | Infrared blocking Detection Method |
| Touch tool | Hand or other solid object |
| Accuracy | ±2mm |
| Response time | < 12ms |
| Available Touch Point | 10 Points |
| Operating Systems | Windows7, 8, 10/ Mac OS 10.7-10.10 |
| PC connector | USB |

| SIGNAL CONNECTIVITY | |
|---------------------|---|
| Video Input | HDMI x 2 (Front x1, Rear x1), Display Port x1, VGA x1, OPS slot x 1 (requires external power) |
| Audio | RCA Speaker Out(R/L), Stereo Mini Lineout, Stereo Mini Input |
| Communication Port | RJ45(LAN), RS-232C(D-sub 9-pin), USB-B (Only for touch control) x1 (Either front or rear port is workable) |
| Front Input | HDMI x1 (as specified in "Video Input"), USB-B (only for touch control as specified in "Communication Port") x1, USB-A x1 |

| MECHANICAL | |
|----------------------|---------------------------------------|
| Dimensions Landscape | 1506 x 902 x 92 mm |
| Weight (Mass) | 43 kg |
| VESA mount | 400 x 200 (mm), M8 Screw |
| Front Glass | Tempered Glass 4.0t (Anti-glare Type) |

| ELECTRICAL | |
|-----------------------------|---------------------------|
| Power Requirement | 100 - 240V AC, 50/60 Hz |
| Power Consumption | Max. 190W |
| Power Consumption (Standby) | < 0.5W |
| Speaker Output | 10W + 10W Stereo (8-ohms) |

| ENVIRONMENTAL | |
|-----------------------|---------------------------------|
| Operating Temperature | 0 ~ 40 °C (32 ~ 104 °F) |
| Storage Temperature | - 20 ~ 60 °C (-4 ~ 140 °F) |
| Operating Humidity | 20% to 80% RH (no condensation) |

| OSD FUNCTIONS | |
|-----------------------|--|
| OSD Language Function | English / Français / Deutsch / Spanish / Portuguese / Italiano / Danish / Swedish / Norwegian / Suomi / Russian / Polish / Turkish / Hungarian / Chesky / Korean |
| OSD Key Lock Function | Support |

| ACCESSORIES | |
|---|--|
| Magnetic stylus pen x 2 , Remote controller, HDMI Cable, USB Cable, Power Cable, CD(User Manual, Installation Manual, Touch driver) | |

| CERTIFICATIONS | |
|--------------------|--|
| QAS, RCM, CB, RoHS | |

QAS, RCM, CB, RoHS



RS232C



HDMI 1

DISPLAY PORT

VGA INPUT

PC AUDIO IN

AUDIO LINE OUT

R L SPEAKER OUT(8Ω)

- Design and specifications are subject to change without notice.
- Microsoft, Encarta, MSN, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- Mac OS® is registered trademarks of Apple Inc.
- HDMI, High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and/or other countries.
- All other trademarks and registered trademarks are the property of their respective owners in the United States and/or other countries.