

# commBOX Interactive Pro



Available in 60", 80" & 90"

With its statement styling the Pro is the preferred touchscreen for the corporate or business environment. Enjoy the speed and accuracy of a superior touchscreen, whilst presenting like a pro in UD 4K resolution.



## Introducing the Interactive Pro

With all the features you know and love from the Classic range, the Pro range is defined by signature styling and 4k ultra-definition resolution. The Pro touchscreen has the perfect balance between practicality and presentation, and doesn't just look impressive, it IS impressive.

Present in  
*style*





## Experience 4K

The Pro range provides stunning resolution at 3840x2160 @60Hz. With ultra sharp graphics and text, your presentations will create a lasting impression.



## Only the Best

All Pro touchscreens utilise the highest Commercial Grade LED display on the market, which boasts a 50,000 hour life expectancy. A Pro Touchscreen will look its best for up to 17 years, with no maintenance or replacement lamps required.



## A Design Statement

CommBox has invested heavily in the research and development of interactive touchscreens, and the aesthetic design principle reflects this. Modern, sleek, quality finishes.


The Pro touchscreen's glossy, streamlined frame and stylish good looks makes a design statement in any room.



## Leading Technology

CommBox utilises the combined camera and infra-red touch technologies (optical) guaranteeing that the Pro touchscreens are ultra-responsive and highly accurate.

All CommBox touchscreens provide the ultimate Windows 8 & 10 touch experience with active borders and incorporating multi-touch and gesture support.

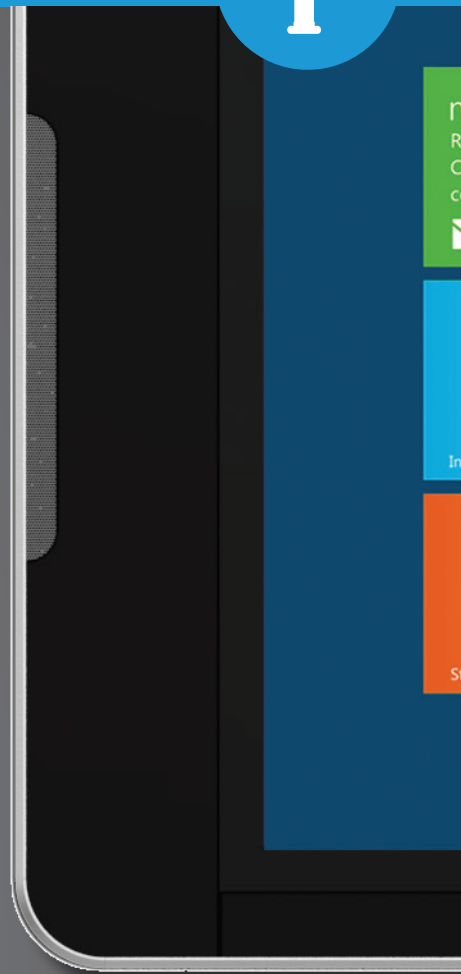

# Pro Specifications

Models



Pro 60



Pro 80



Pro 90

LED Display  
Manufacturer

SAMSUNG  
Commercial Grade

SAMSUNG  
Commercial Grade

LG  
Commercial Grade

Screen

Resolution

UD 3840x2160 @60Hz

UD 3840x2160 @60Hz

UD 3840x2160 @60Hz

Brightness

450cd/m2

500cd/m2

350cd/m2

Viewing Angle

178°

178°

178°

Noise

Below 40dB 25C

Below 40dB 25C

Below 40dB 25C

Surface Temp

Below 10 at 24C

Below 10 at 24C

Below 10 at 24C

Operating Con

5C to 35C

5C to 35C

5C to 35C

Touch

Points




4 (10 optional) Fingertips or anytips



Technology

Infra-Red & Optical

Dimensions



Display Area

60"

80"

90"

Screen

1552(W) x 860(H) x  
100(D)mm

2024(W) x 1120(H) x  
98(D)mm

2236(W) x 1237(H) x  
98(D)mm

Packed

1740(W) x 1020(H) x  
315(D)mm

2254(W) x 1320(H) x  
320(D)mm

2465(W) x 1345(H) x  
320(D)mm

Weight

Screen

55kg

105kg

124kg

Packed

62kg

112kg

145kg

Power

AC 100 to 240V, 50/60Hz Power Supply



Accessories

HDMI Cable  
USB Cable

USB Extension Cable  
Stylus Pen

Cleaning Cloth

Speakers

10W x 2 Internal Speakers  
15W x 2 Speaker Out



Input/Output

HDMI x 4, VGA, Component,  
RS-232, USB

